


# PETROSTEP® SI-1

## *Inorganic Scale Inhibitor*


Scale can deposit on almost any surface. Once formed, it will continue to build unless it is treated. Stepan Oilfield Solutions' PETROSTEP SI-1 is a proven inorganic scale inhibitor. In Dynamic Scale Loop Tests (DSL), the new PETROSTEP SI-1 outperforms other commercially available products in preventing scale build-up.

Using a 30% dilution of PETROSTEP SI-1, neutralized with sodium hydroxide, at 25 ppm for a calcite brine and at 50 ppm for a gypsum brine, we compared how well it prevented crystal formation versus two competitors' scale inhibitors at the same dilution and treating rate. Scale build-up was measured by an increase in differential pressure inside the test section. Figures 1 and 2 below show lower differential pressure when the brine is treated with PETROSTEP SI-1 (grey lines) compared to the brine left untreated (red lines) and the brines treated with competitive products (light blue and dark blue lines). The difference in efficacy is especially apparent in the rapid pressure rise of gypsum brine treated with competitor 1, as shown in Figure 2.

**FIGURE 1** Calcite Brine Treated with 25 ppm of PETROSTEP SI-1 at 70°C and 500 psi

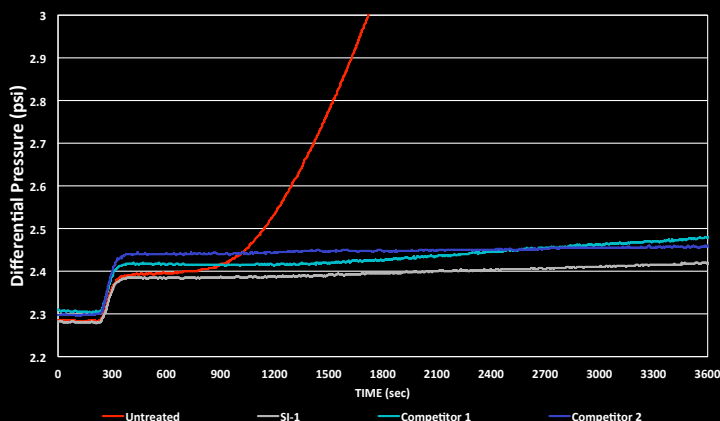

**FIGURE 2** Gypsum Brine Treated with 25 ppm of PETROSTEP SI-1 at 70°C and 500 psi

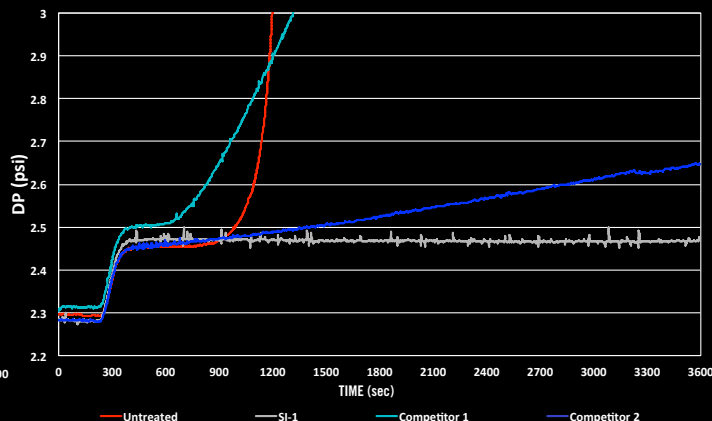

### DSL SUMMARY

- Treating rate: 30% dilution of PETROSTEP SI-1 neutralized with sodium hydroxide
- Test temperature: 70°C
- Test duration: 1 hour
- Instrument: Ametek Chandler Dynamic Scale Formation System

Taking these conditions from the tests to the field, scale build-up takes on a more serious implication in the pipeline as it can block the flow of production fluids, as well as potentially create a site for under-deposit corrosion. If scale is allowed to build up in treating tanks and on equipment, extensive time and effort may be required to remove it. PETROSTEP SI-1 can mitigate these issues by binding with the scale particles and preventing them from agglomerating.

In the photos below, you can see scale precipitating at the bottom of untreated brines. Brines treated with PETROSTEP SI-1 remain clear, without any scale precipitation.



#### BOTTLE TEST METHOD

Brine composition: NACE<sup>1</sup> Laboratory Screening Test - TM0374-2007

Treating rate: 100 ppm (30% dilution of neutralized PETROSTEP SI-1)

Test temperature: 70°C

Test duration: 24 hours

### PRODUCT PROPERTIES AND APPLICATION RECOMMENDATIONS:

#### PHYSICAL PROPERTIES

- Solids: 68 – 72%
- Appearance at 25°C: clear liquid
- Color Gardner: 6 maximum
- pH (5% in water): 1.5 – 2.5
- Specific gravity: 1.2 – 1.5

#### FORMULATION RECOMMENDATIONS (W.W%)

- 30% PETROSTEP SI-1
- 10 – 15% base to neutralize to pH 6 – 7.5
  - Base options for optimum results: sodium hydroxide, potassium hydroxide, monoethanolamine
- 55 – 65% deionized water

#### APPLICATIONS

- Scale inhibition (calcite, gypsum and barite)
- Working temperature: up to 70°C
- Working pH: 5 – 8

#### TREATING RATE

- 50 – 200 ppm with above formulation, or
- 2 – 50 ppm based on active concentration

<sup>1</sup>National Association of Corrosion Engineers

PETROSTEP® is a registered trademark of Stepan Company. The information contained herein is based on the manufacturer's own study and the works of others and is subject to change without prior notice. The information is not intended to be all-inclusive, including as to the manner and conditions of use, handling, storage or disposal or other factors that may involve additional legal, environmental, safety or performance considerations. Nothing contained herein grants or extends a license, express or implied, in connection with any patents issued or pending of the manufacturer or others, or shall be construed as a recommendation to infringe any patents. STEPAN COMPANY MAKES NO PRODUCT WARRANTY OF MERCHANTABILITY OR OF FITNESS FOR A PARTICULAR USE, EXPRESS OR IMPLIED, AND NO OTHER WARRANTY OR GUARANTY, EXPRESS OR IMPLIED, IS MADE, INCLUDING AS TO INFORMATION REGARDING PERFORMANCE, SAFETY, SUITABILITY, STABILITY, ACCURACY, COMPLETENESS, OR ADEQUACY. Stepan Company (and its employees, subsidiaries and affiliates) shall not be liable (regardless of fault) to the vendee, its employees, or any other party for any direct, indirect, special or consequential damages arising out of or in connection with the accuracy, completeness, adequacy, furnishing, use, or reliance upon information provided herein. The vendee assumes and releases Stepan Company (and its employees, subsidiaries and affiliates) from all liability, whether in tort, contract or otherwise to the fullest extent possible under the relevant law.